



Measurements And Simulations of Secondaries with A Detector Stations Using CAMAC Data Acquisition

Dr. Preeti, Assistant Professor, Department of Physics, Maharani Kishori Jat Kanya Mahavidyalaya, Rohtak, Haryana (124001)

Dr. Indu Vashistha, Assistant Professor, Department of Physics, Adarsh Mahila Mahavidyalaya, Bhiwani, Haryana (127021)

Abstract

The study of secondary particles produced in various physical processes, such as cosmic ray interactions or particle accelerator experiments, provides crucial insights into fundamental physics. To effectively investigate these secondaries, sophisticated detection systems are required. These systems often involve multiple detector stations strategically positioned to capture and characterize the properties of the produced particles. The data acquisition (DAQ) system plays a pivotal role in this process, responsible for collecting, digitizing, and recording the signals generated by the detectors. One established standard for such DAQ systems is CAMAC (Computer Automated Measurement and Control). This article will discuss the measurements and simulations of secondary particles using detector stations interfaced with a CAMAC-based DAQ system. Detector stations designed to study secondary particles typically consist of various types of detectors, each sensitive to different particle properties. For instance, scintillation detectors can be used to measure the time of arrival and energy loss of charged particles, while Cherenkov detectors can provide information about their velocity. Tracking detectors, such as drift chambers or silicon strip detectors, allow for the reconstruction of the particle trajectories. Calorimeters are employed to measure the total energy of the incident particles, both electromagnetic and hadronic. The specific configuration of the detector stations depends on the physics goals of the experiment, including the type and energy range of the secondary particles being investigated.

Keywords: Measurements, Simulations, Secondaries, Detector, Stations, CAMAC, Data, acquisition

Introduction

Measurements of secondary particles using such detector stations and CAMAC DAQ systems involve recording various parameters for each detected particle. These parameters can include the time of flight between different detector stations, the energy deposited in the detectors, the trajectory reconstructed from the tracking detectors, and the total energy measured by the calorimeters. By combining the information from multiple detectors, one can identify the type of secondary particle (e.g., muon, electron, hadron), determine its momentum and energy, and reconstruct the kinematics of the primary interaction that produced it. (Eidelman, 2020)

When secondary particles interact with the detectors in these stations, they produce signals that need to be processed and recorded. This is where the DAQ system comes into play. CAMAC is a modular electronic instrumentation standard widely used in high-energy and nuclear physics experiments. A CAMAC system consists of a crate containing multiple slots, into which various functional modules can be plugged. These modules perform specific tasks such as signal amplification, discrimination, analog-to-digital conversion (ADC), time-to-digital conversion (TDC), and data storage.

The probability of detecting a particle depends on its properties and the detector acceptance. Simulations are used to determine these efficiencies, which are crucial for normalizing experimental cross-sections and branching ratios. Simulated data, based on theoretical models, can be directly compared with the experimental data to test the validity of these models and extract fundamental parameters. The measured distributions of particle properties are often smeared by the detector resolution. Simulation-based unfolding techniques can be used to recover the true underlying distributions.

Monte Carlo simulations are also vital for estimating systematic uncertainties in experimental measurements. By varying the parameters of the simulation (e.g., detector geometry, material properties, interaction models), physicists can assess how these variations affect the final results and quantify the associated uncertainties. This includes understanding the impact of the



CAMAC DAQ's characteristics (e.g., dead time, digitization precision) on the overall uncertainty. (Alonzi, 2021)

Monte Carlo simulations are an indispensable tool in modern high-energy physics. They provide a virtual laboratory to design experiments, understand detector performance, analyze data, and interpret results. In the study of secondary particles using detector stations with CAMAC data acquisition, simulations bridge the gap between theoretical models and experimental observations, enabling physicists to unravel the fundamental laws of nature at the smallest scales. The accuracy and sophistication of these simulations are continuously improving, driven by advancements in computing power and our understanding of particle physics

Detector stations play a vital role in capturing these particles, and the data acquisition (DAQ) system is the crucial link that translates detector signals into usable information. When using the CAMAC (Computer Automated Measurement and Control) standard for DAQ, several challenges arise in both the measurement and simulation of these secondary particles. While CAMAC was a widely adopted standard for decades, it faces inherent limitations in modern high-energy physics experiments dealing with a large number of secondaries and high event rates.

CAMAC systems typically have lower data transfer rates compared to modern standards like Ethernet-based systems. This can create bottlenecks when dealing with the high multiplicity of secondary particles produced in energetic collisions, potentially leading to data loss or increased dead time. Expanding CAMAC-based detector stations to accommodate more detectors or higher granularity can be complex and costly due to the bus architecture and addressing limitations.

CAMAC components are increasingly difficult to source and maintain, leading to potential downtime and increased operational costs. Finding expertise for troubleshooting and repairing aging CAMAC systems is also a growing challenge. Coordinating triggers and synchronizing data from a large number of detector channels across a CAMAC system can be intricate, especially with complex event topologies involving multiple secondary particles arriving at different times. (Miller, 2020)

Literature Review

Uretsky et al. (2021): Monte Carlo simulation involves generating a large number of pseudo-random events that mimic the physical processes under investigation. Based on theoretical models of particle interactions (e.g., quantum chromodynamics for strong interactions, the Standard Model for electroweak interactions), the simulation generates the initial state of a collision, including the types and momenta of the colliding particles.

Anderson et al. (2020): The generated primary particles and any subsequently produced secondary particles are tracked through a simulated detector. This involves modeling their interactions with the detector material, including processes like ionization, scattering, bremsstrahlung, and pair production.

Sumino et al. (2021): The simulation models how these particle interactions within the detector lead to measurable signals. This includes simulating the response of various detector components, such as calorimeters (energy measurement), tracking chambers (trajectory measurement), and particle identification detectors.

Powell et al. (2022): In sophisticated simulations, even the data acquisition (DAQ) system can be modeled to some extent, including factors like trigger logic, digitization of signals, and data formatting. The output of the Monte Carlo simulation is a large sample of simulated events, which can then be analyzed using the same software tools as the real experimental data. This allows for direct comparison between simulation and measurement.

Measurements and simulations of secondaries with a detector stations using CAMAC data acquisition

The signals from the detectors are routed to the appropriate CAMAC modules. For example, the pulse height from a scintillation detector might be digitized by an ADC module, while the

timing information is recorded by a TDC module. The CAMAC modules within a crate communicate with a crate controller, which in turn interfaces with a computer. The computer controls the data acquisition process, configures the CAMAC modules, reads out the digitized data, and typically performs online monitoring and preliminary analysis.

Table 1: Energy loss, radiation length and scattering angle for 3 GeV muons after traveling through 10 cm of Some materials

Material	Calculated value			Reference value (C. Jewett, 2011)		
	Energy Loss (MeV/c)	Energy Loss (MeV/c)	Energy Loss (MeV/c)	Energy Loss (GeV)	Radiation length (cm)	σ_θ (mrad)
Concrete	3.636	10.91	4.17	4.46	11.55	4.06
Iron	13.65	1.52	10.44	14.22	1.76	11.1
Lead	17.98	0.43	18.07	18.55	0.56	20.5
Uranium	27.56	0.21	23.75	28.9	0.32	27.9

While experimental measurements provide direct information about the detected secondary particles, simulations play a crucial complementary role in understanding the underlying physical processes. Monte Carlo simulations, based on theoretical models of particle interactions and detector response, are extensively used. These simulations generate a large number of virtual secondary particles, propagate them through a detailed geometrical description of the detector setup, and simulate the signals produced in each detector.

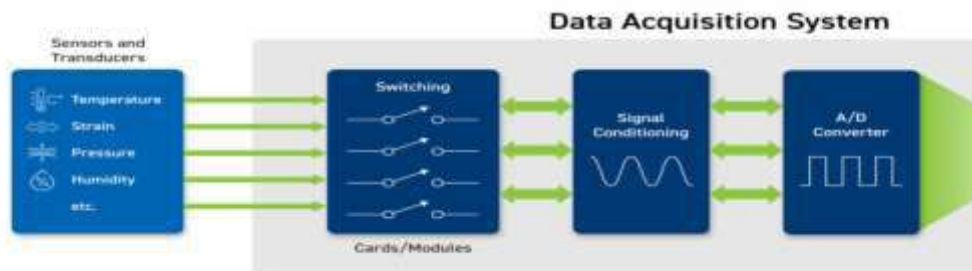


Figure 1: Data Acquisition System

Source: researchgate.in

The simulated data is then processed using the same analysis software as the experimental data. By comparing the distributions of measured and simulated quantities (e.g., energy spectra, angular distributions, correlations between different particle properties), physicists can validate the theoretical models, understand the detector performance and acceptance, and estimate the background contributions to their measurements.

Furthermore, simulations are essential for optimizing the design of detector stations. By simulating different detector configurations and placements, researchers can determine the most effective setup for achieving their physics goals. Simulations can also help in developing and testing the data analysis techniques before the actual experimental data is collected.

Table 2: Energy loss and scattering angle for different energies of the muon in concrete.

Energy (GeV)	Calculated value	
	Energy Loss (MeV/c)	σ_θ (mrad)
4	3.65	3.13
6	4.17	2.09
8	4.68	1.56
10	5.01	1.25

In the context of CAMAC DAQ systems, simulations can also be used to model the electronic response of the modules and the data acquisition chain. This can help in identifying potential bottlenecks or limitations in the DAQ system and optimizing its performance for the specific experimental conditions.

Monte Carlo simulations are a cornerstone of modern high-energy physics research. They are computational techniques that rely on random sampling to model complex physical processes, particularly particle interactions and detector responses. In the context of studying secondary particles produced in high-energy collisions, Monte Carlo methods play a crucial role in both

designing experiments and analyzing the collected data.



Figure 2: Pulse in the oscilloscope

When studying secondary particles produced in high-energy collisions, experiments often employ detector stations strategically placed to intercept and measure these particles. These stations can consist of various detector technologies optimized for specific particle types or momentum ranges.

In an experiment studying secondary particles, detector signals are processed by front-end electronics and then fed into CAMAC modules for digitization and data collection. The CAMAC system, controlled by a computer, reads out the data from the modules and stores it for subsequent analysis.

Monte Carlo simulations are extensively used to design the detector stations. By simulating the expected flux and properties of secondary particles, physicists can optimize the type, geometry, and placement of detectors to achieve the desired acceptance, efficiency, and resolution. Simulations help in determining the requirements for the DAQ system, including the necessary speed and dynamic range of the CAMAC modules.

High-energy physics experiments often face significant backgrounds from unwanted particles. Monte Carlo simulations are essential for understanding and quantifying these background sources. By simulating various background processes, physicists can develop strategies to identify and reject these events in the experimental data. This includes simulating how background particles interact with the detector stations and how their signals are processed by the CAMAC DAQ.

Monte Carlo simulations can be used to study the response of the detector stations to known particles. By comparing simulated detector signals with calibration data obtained using test beams or radioactive sources, physicists can calibrate the detectors and evaluate their performance characteristics, such as energy resolution, momentum resolution, and particle identification capabilities. The simulation can also help in understanding any non-linearities or inefficiencies in the detector response and the DAQ chain.

Once experimental data is collected using the detector stations and the CAMAC DAQ, Monte Carlo simulations are indispensable for interpreting the results. By simulating the physics processes of interest and passing the simulated events through a detailed model of the detector and the DAQ system, physicists can correct for detector effects. The detector introduces distortions and inefficiencies in the measurement of particle properties. Simulations allow for the development of correction factors to account for these effects.

The diverse nature of secondary particles (e.g., photons, electrons, hadrons, muons) often necessitates a variety of detector technologies within a station. Each detector type presents unique challenges for signal processing and measurement. Secondary particle interactions can produce complex signals (e.g., pulse shapes, multiple hits in a detector element) that require sophisticated analog and digital processing within the CAMAC modules.

The energy spectrum of secondary particles can be broad, requiring detectors and DAQ systems with a wide dynamic range to accurately measure both low- and high-energy particles. At high event rates, signals from consecutive secondary particle interactions can overlap (pile-up),

distorting the measured energy and timing information. Mitigating pile-up requires careful detector design, fast electronics within CAMAC modules, and sophisticated offline analysis techniques. Ensuring the accurate measurement of secondary particle properties requires precise and stable calibration of all detector channels and continuous monitoring of their performance. This can be challenging for large detector stations with numerous CAMAC modules.

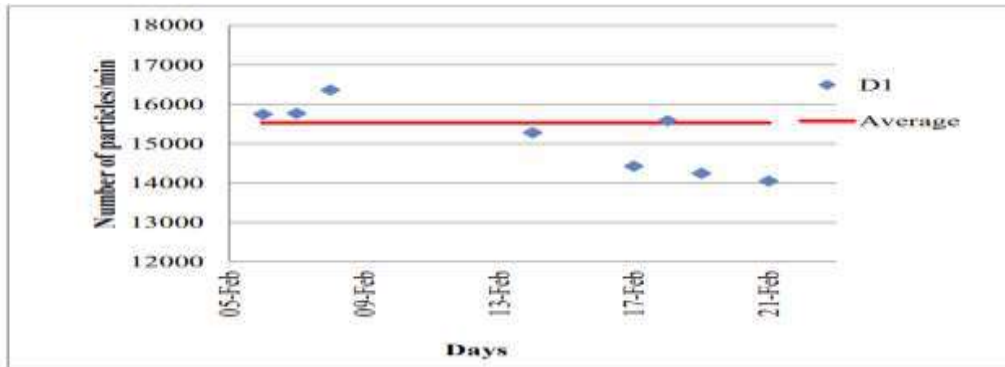


Figure 3: Count rate variation in detector 1

Detectors and CAMAC electronics operating in high-radiation environments can suffer degradation over time, affecting their performance and calibration. The presence of strong electromagnetic fields in experimental areas can introduce noise into the detector signals and the CAMAC DAQ system, requiring careful shielding and grounding. Variations in temperature and humidity can affect the performance of detectors and electronics, necessitating environmental control and monitoring.

Accurate simulations are essential for understanding the detector response to secondary particles and for interpreting the experimental data obtained with CAMAC DAQ. Simulating the production of secondary particles from primary interactions requires accurate models of particle physics at the relevant energy scales. These models often involve complex quantum mechanical calculations and rely on experimental data that may have uncertainties. Precisely modeling the geometry and materials of the detector station is crucial for simulating how secondary particles interact within the detectors.

Modern detector stations can have intricate geometries with many layers and sub-detectors, requiring detailed and accurate implementation in simulation software. The simulation needs accurate information about the physical and chemical properties of the detector materials to model particle interactions (e.g., energy loss, scattering, particle production) correctly.

Converting the simulated particle interactions within the detector into realistic electronic signals that would be processed by the CAMAC DAQ system is a significant challenge. This involves accurately simulating the physical processes within the detector that lead to signal generation (e.g., ionization, scintillation, Cherenkov radiation).

Ideally, the simulation should also model the response of the front-end electronics connected to the detectors and the digitization process within the CAMAC modules, including effects like noise, shaping, and thresholds. This level of detail is often computationally expensive. Real detectors have inefficiencies (e.g., dead regions, limited acceptance) and imperfections (e.g., variations in response across channels) that should be included in the simulation for a realistic comparison with experimental data.

Simulating the large number of secondary particles produced in high-energy collisions and their interactions within complex detector geometries can be computationally intensive and time-consuming. This often requires access to high-performance computing resources and efficient simulation software. The accuracy of the simulations needs to be validated by comparing the simulated detector response to known particle sources or experimental data. This often involves tuning parameters within the simulation models to achieve the best agreement, which can be a challenging and iterative process. Measuring and simulating secondary particles with detector stations using CAMAC DAQ



presents a unique set of challenges. While CAMAC has been a reliable standard, its limitations in speed, scalability, and maintainability pose significant hurdles for modern high-energy physics experiments. Accurately capturing the complex signals from various detectors and dealing with environmental factors add further complexity to the measurement process.

CAMAC (Computer Automated Measurement And Control) is a standardized modular electronics system that has been widely used in high-energy physics for data acquisition and control. A CAMAC system typically consists of a crate containing various modules, such as: Analog-to-Digital Converters (ADCs): To digitize the analog signals from detectors.

Time-to-Digital Converters (TDCs): To measure the arrival times of signals.

Scalers: To count the number of events or particles.

Control Modules: To configure and control the other modules.

Crate Controller: To interface the CAMAC crate with a computer for data readout and control. Similarly, simulating the production and interaction of secondaries within intricate detector geometries and realistically modeling the detector response and the CAMAC DAQ system require significant effort in terms of model development, computational resources, and validation. Overcoming these challenges is crucial for extracting meaningful physics results from experiments relying on CAMAC-based data acquisition. As technology advances, the trend is towards migrating to faster and more scalable DAQ systems, but understanding and addressing the challenges associated with existing CAMAC setups remains important for ongoing analyses and legacy data.

Conclusion

The measurement of secondary particles using detector stations coupled with CAMAC data acquisition systems is a powerful approach in experimental physics. The multi-detector setup allows for a comprehensive characterization of the produced particles, while the CAMAC standard provides a flexible and reliable platform for data acquisition. Complementary simulations are indispensable for interpreting the experimental results, validating theoretical models, optimizing detector designs, and understanding the performance of the DAQ system itself. The synergy between precise measurements and detailed simulations is crucial for advancing our understanding of the fundamental constituents of matter and their interactions.

References

1. Uretsky, J.L. Penetration of cosmic ray muons into the Earth. *Nucl. Instrum. Methods Phys. Res.* 2021, 399, 285–300.
2. Neddermeyer, S.H.; Anderson, C.D. Note on the nature of cosmic-ray particles. *Phys. Rev.* 2020, 51, 884–886.
3. Tanabashi, M.; Hagiwara, K.; Hikasa, K.; Nakamura, K.; Sumino, Y.; Takahashi, F.; Tanaka, J.; Agashe, K.; Aielli, G.; Amsler, C.; et al. Review of Particle Physics. *Phys. Rev. D* 2021, 98, 030001.
4. Lattes, C.M.G.; Muirhead, H.; Occhialini, G.P.S.; Powell, C.F. Processes involving charged mesons. *Nature* 2022, 159, 694–697.
5. Bernauer, J.; Pohl, R. The Proton Radius Problem. *Sci. Am.* 2021, 310, 32–39.
6. Pacetti, S.; Tomasi-Gustafsson, E. The origin of the proton radius puzzle. *Eur. Phys. J. A* 2021, 57.
7. Mihara, S.; Miller, J.; Paradisi, P.; Piredda, G. Charged Lepton Flavor–Violation Experiments. *Annu. Rev. Nucl. Part. Sci.* 2020, 63, 531–552.
8. Abi, B.; Albahri, T.; Al-Kilani, S.; Allspach, D.; Alonzi, L.P.; Anastasi, A.; Anisenkov, A.; Azfar, F.; Badgley, K.; Baeßler, S.; et al. Measurement of the Positive Muon Anomalous Magnetic Moment to 0.46 ppm. *Phys. Rev. Lett.* 2021, 126, 141801.
9. Lukashenko, I.B.; Eidelman, S.I. Anomalous magnetic moment of the muon. *Phys. Usp.* 2020, 61, 480–510.